


HETTICH
OPTIMAT 3E
SPEC SHEET



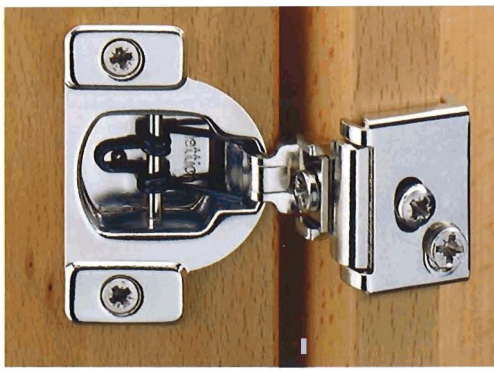



Optimat 3E 6-way face frame hinge

Opening angle: 110°
 Drilling diameter: 35 mm
 Cup distance C: 2,5 mm*)
 Cup depth: 10,0 mm

Depth adjustment: +2.4 mm/-0.6 mm
 Side adjustment: +1.5 mm/-1.5 mm
 Height adjustment: +2.5 mm/-2.5 mm
 Packing unit: 200 pcs


Screw-on T 42/10

Press-in T 43/10



Overlay


1/2"
(12,7 mm)

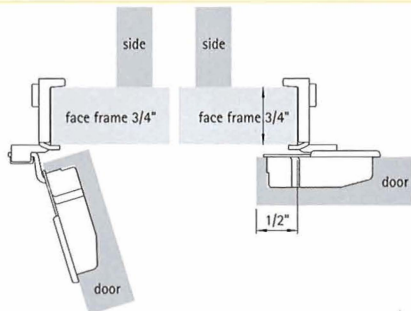

available on request

904 049 9

1 1/4"
(31,75 mm)




available on request

904 050 0

*)For back bevelled doors (1/2" overlay by use of 4 mm cup distance)

7/16"
(11,1 mm)

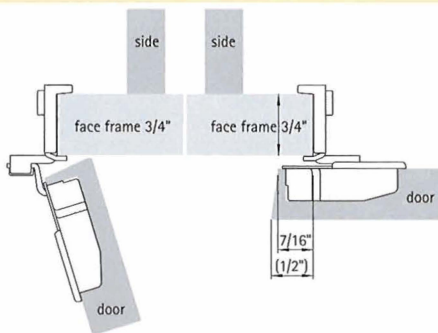

available on request

904 049 8

Cover cap
for Optimat 3E
available on request

